


Product Datasheet

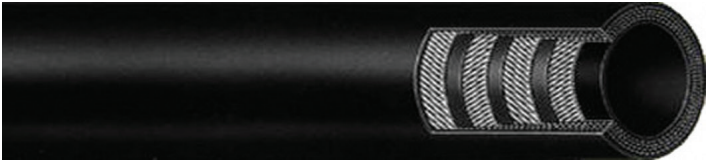

Technical Specification

1. Description

Low Pressure Textile Reinforced EPDM Steam Hose.

2. Applications:

For use with steam to a maximum working pressure of 100 PSI, can also be used as a multi-purpose hose for compressed air, hot and cold water, nitrogen and delivery of many chemicals.

3. Tube

Versigard synthetic rubber

4. Cover

Versigard synthetic rubber, (wrapped impression)

5. Reinforcement

4 plies textile

6. Temperature

-18°C to +170°C

7. Coil Size

40 mtrs (cut length: 20 mtrs)

8. Colour

Black

Inside Diameter		Outside Diameter		Working Pressure		Burst Pressure		Vacuum HG		Bend Radius	Weight	CMT Part Number
(mm)	(inch)	(mm)	(inch)	(psi)	(bar)	(psi)	(bar)	(mm)	(inch)	(mm)	(kg's/mtr)	
12.70	1/2	28.6	-	100	7	-	-	-	-	-	0.58	0780105
19.05	3/4	34.7	-	100	7	-	-	-	-	-	0.84	0780110
25.40	1	41.0	-	100	7	-	-	-	-	-	0.91	0780115
31.75	1 ¼	46.5	-	100	7	-	-	-	-	-	1.07	0780120
38.10	1 ½	53.7	-	100	7	-	-	-	-	-	1.30	0780125
50.80	2	66.8	-	100	7	-	-	-	-	-	1.74	0780130

